

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:


0 577 924 A1

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **93104680.9**(51) Int. Cl.⁵: **H04N 1/387**(22) Date of filing: **22.03.93**(30) Priority: **29.06.92 JP 170581/92**(43) Date of publication of application:
12.01.94 Bulletin 94/02(84) Designated Contracting States:
DE FR GB(71) Applicant: **Kabushiki Kaisha Toshiba**
72, Horikawa-cho
Saiwai-ku
Kawasaki-shi(JP)(72) Inventor: **Moro, Akihiro, c/o Intellectual**
Property Division
Kabushiki Kaisha Toshiba,
1-1 Shibaura 1-chome
Minato-ku, Tokyo 105(JP)(74) Representative: **Blumbach Weser Bergen**
Kramer Zwirner Hoffmann Patentanwälte
Radeckestrasse 43
D-81245 München (DE)(54) **Image forming apparatus producing a composite image of documents of different sizes.**

(57) A copier of this invention, when its automatic detecting function has determined that it is possible to combine multiple documents, combines the multiple documents into a composite image and copies the image on an output sheet in continuously copying documents of different sizes by means of an automatic document feeder. The copier contains the function (61) of detecting based on the document size from the detector (65), the reduction rate of the document from the setting function (39), and the size of an image bearing member from the selecting function (38) whether or not it is possible to combine the reduced images of the following and later documents and copy the resulting image, and an image memory (67) for storing the composite image of the documents. In an image forming apparatus of this arrangement, documents of different sizes are checked one by one according to their document size and reduction rate and continuous copying is done in the form of a suitable composite image. Like the image forming apparatus, an image forming method of this invention contains a step of detecting based on the document size, the reduction rate of the document, and the size of an image bearing member whether or not it is possible to combine the reduced images of the following and later documents and copy the resulting image, with respect to each document, in copying documents of different sizes automatically. This makes it possible to obtain a suitable composite image according to the size of

each document.

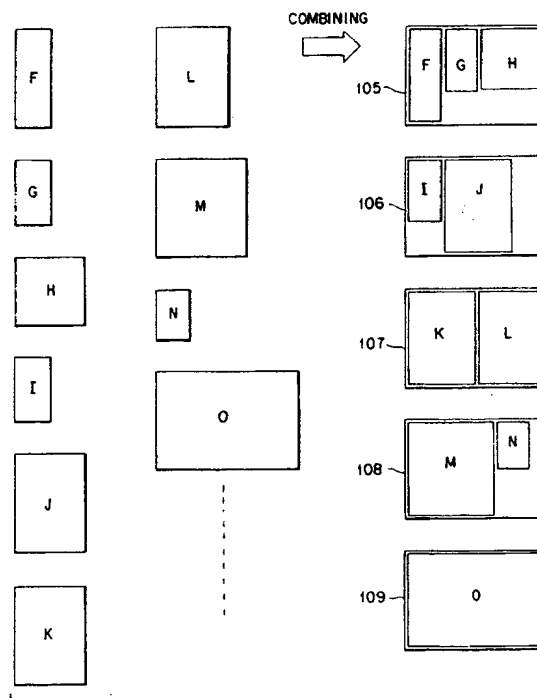**FIG. 13****EP 0 577 924 A1**

This invention relates to an image forming apparatus, such as a copier, that reads the image on a document, for example, and forms an image according to the read signal on a sheet of paper.

With copiers, an automatic document feeder that feeds documents automatically to a document table for copying is generally used for reproduction of a desired number of copies of a desired size, because it is hard work just to put documents one after another on the document table when a lot of documents have to be copied.

When documents or material of two or more sizes are copied through the automatic document feeder, if documents of large sizes could be copied on a one-document one-output sheet basis and only documents of small sizes copied on a single output sheet, the number of copying sheets used would be decreased.

Once driven with the operation data set, however, conventional automatic document feeders continue a series of processes regardless of document size, so that such a process of scaling down two or more documents only in the case that they are of small sizes so as to pack them into a single copying sheet is not be carried out automatically. Therefore, the operator stops the automatic mechanism, lays out as many sheets of material on the document table as he wants to copy on a single copying sheet, reduces the scale, and finally copies them. As a result, copying documents of two or more sizes so as not to waste output sheets involves troublesome manual operations and longer working hours.

The object of the present invention is to provide a copier that, when multiple documents can be copied on a single output sheet, lays out and copies the multiple documents on a single output sheet in continuously copying documents of different sizes at a specified reduction rate by means of an automatic document feeder.

An image forming apparatus comprises: means for supplying a plurality of documents consecutively, the documents having a first document and a second document; first detecting means for detecting a size of the document supplied by the supplying means; means for reading an original image on the document supplied by the supplying means; means for forming the image in accordance with the original image read by the reading means on an image bearing member so that the image is reduced at a predetermined reduction rate; second detecting means for detecting that an area occupied by a first image corresponding to the first document and a second image corresponding to the second document is less than that of the image bearing member, based on the document size detected by the first detecting means, the reduction rate and a size of the image bearing member; and

means for combining the first image and the second image so that the first image and the second image are formed on one image bearing member corresponding to the detection of the second detecting means.

With this arrangement, it is possible to copy documents of different sizes continuously in the form of a suitable composite image according to their size and reduction rate. Specifically, with the invention, documents of different sizes are automatically supplied and it is judged from the reduction rate, the document size, and the size of the copying sheet whether or not it is possible to combine multiple documents and copy the resulting composite image. If it is possible, the composite reduced image is stored in the storing means and copied on a copying sheet (an image bearing material). If it is impossible, the image information on the single document is reduced at the set reduction rate and the reduced image is copied on a single copying sheet.

Therefore, even when it is impossible to determine how to combine and output documents of different sizes at the start of continuous copying, the document size detecting function and the combination possibility detecting function of the apparatus enable a suitable image combining process to be performed automatically.

An image forming method comprises: a step of supplying a plurality of documents consecutively, the documents having a first document and a second document; a first detecting step of detecting a size of the document supplied by the supplying means; a step of reading an original image on the document supplied by the supplying means; a step of forming the image in accordance with the original image read by the reading means on an image bearing member so that the image is reduced at a predetermined reduction rate; a second detecting step of detecting that an area occupied by a first image corresponding to the first document and a second image corresponding to the second document is less than that of the image bearing member, based on the document size detected by the first detecting means, the reduction rate and a size of the image bearing member; and a step of combining the first image and the second image so that the first image and the second image are formed on one image bearing member corresponding to the detection of the second detecting means.

Like the image forming apparatus, the image forming method is to detect whether or not it is possible to combine documents of different sizes and copy the composite image on a copying sheet, with respect to each document. Specifically, the document size is detected for each document, and it is detected from the reduction rate and the size of the copying sheet whether or not it is possible to

combine the documents. If it is possible, the documents are combined to obtain a composite image. As a result, even when it is impossible to determine how to combine and output documents of different sizes at the start of continuous copying, an optimum composite copying process can be executed.

This invention can be more fully understood from the following detailed description when taken in conjunction with the accompanying drawings, in which:

Fig. 1 is a block diagram schematically showing an overall control system of an image forming apparatus according to an embodiment of the present invention;

Fig. 2 is an outward view showing the entire construction of the image forming apparatus of Fig. 1;

Fig. 3 is a sectional view showing the entire construction of the image forming apparatus of Fig. 1;

Fig. 4 is a sectional view schematically showing the construction of the document-scanning section of Fig. 3;

Fig. 5 is a view used for explaining the construction of the sheet size sensing section of Fig. 3;

Fig. 6 shows a table used for explaining the relationship between the sheet size for the supply cassette and the sensing switch of the sheet size sensing section of Fig. 3;

Fig. 7 is a sectional view schematically showing the construction of the automatic document feeder of Fig. 3;

Figs. 8 and 9 are flowcharts used for explaining the operation of the image forming apparatus of Fig. 1;

Fig. 10 is an explanatory diagram used to explain the relationship between two document images and those printed on an output sheet;

Fig. 11 is an explanatory diagram used to explain the relationship between document images of different sizes and those printed on output sheets;

Fig. 12 is a flowchart used to explain the operation of an image forming apparatus of the present invention; and

Fig. 13 is an explanatory diagram used to explain the relationship between document images of different sizes and those printed on output sheets.

Referring to the accompanying drawings, an embodiment of the present invention will be explained.

Figs. 2 and 3 show a heat-transfer copier with an automatic document feeder as an example of an image forming apparatus of the present invention;

Specifically, numeral 1 indicates a copier body, on the top of which an automatic document feeder

40 that transports a document O automatically is mounted.

On the top of the copier body 1, a document table (of transparent glass) 2 onto which the document O is fed from the automatic document feeder 40 is provided.

In the copier body 1, there are a document scanning section 3 that scans and reads the document O set on the document table 2 and, in the lower part, an image forming section 4. The document table 2 is secured to the body 1.

The document scanning section 3 is constructed as shown in Fig. 4, for example. Specifically, it is composed of a first carriage 7 provided with an exposure lamp 6 as a light source, a second carriage 8 that deflects an optical path by means of mirrors, a zoom lens 16, a mirror section 10 that directs the reflected light from the document O to a photoelectric conversion section 11 and corrects the optical path length at the time of varying the power of lens, a photoelectric conversion section 11 that receives the reflected light from the document O, and a driving system (not shown) that changes the position of each section.

The first carriage 7 is provided with the exposure lamp 6 projecting light on the document O, a reflector 12 serving as a reflecting mirror that collects rays of light from the exposure lamp 6 onto the document, and a mirror 13 directing the reflected light from the document O to the second carriage 8.

The second carriage 8 is provided with mirrors 8a and 8b directing the light introduced by the mirror 13 to the zoom lens 16. The first and second carriages 7 and 8 are coupled with each other by means of a timing belt (not shown) so that the second carriage 8 may move in the same direction at half the speed of the first carriage 7. This allows scanning to be done so that the optical path length to the zoom lens 16 may be constant.

The zoom lens 16, whose focal length is fixed, is designed to move along the optical axis at the time of varying its power.

The mirror section 10 is composed of two mirrors 10a and 10b. The position of the mirrors 10a and 10b is changed according to the change of the optical path length according to the variable power selected. By deflecting the optical path of the light from the zoom lens 16 by means of the two mirrors 10a and 10b, the light is directed to the photoelectric conversion section 11.

The photoelectric conversion section 11, which photoelectrically converts the reflected light from the document O, is composed mainly of a CCD line image sensor, for example. Here, a single pixel of the document O corresponds to one element of a CCD sensor. The output of the photoelectric conversion section 11 is supplied to a document

scanning section processing section 69, which will be explained later.

The movement of the first and second carriages 7 and 8 and mirrors 10a and 10b is controlled by a stepping motor (a scanning motor) 18.

The first and second carriages 7 and 8 are designed to move according to the movement of a timing belt stretched between a drive pulley (not shown) coupled with the rotating shaft of the stepping motor 18 and an idler pulley (now shown).

The zoom lens 16 is designed to move along the optical axis by the movement of a spiral shaft (not shown), which is rotated by a corresponding stepping motor (not shown).

The image forming section 4 is constructed as shown in Fig. 3, for example. Specifically, a platen drum 22 is provided in the near center of the image forming section 4. The platen drum 22, whose periphery is formed of an elastic material such as rubber, serves as a platen roller for a thermal head 24. The platen drum 22 rotates clockwise to wind a sheet P around itself to hold the sheet P in place in superposed printing. Around the platen drum 22, pressure rollers 25 are provided at regular intervals which prevent the sheet P from floating on the platen drum 22. The circumference of the platen drum 22 is a little larger than the longitudinal length of a sheet of the maximum size.

The thermal head 24, which is located at the lower left of the platen drum 22, is attached to a heat sink integrally formed on the rear end of the holder. Between the platen drum 22 and the thermal head 24, an ink ribbon 26 intervenes as an image forming medium.

Reel hubs 30 and 31 of the ink ribbon 26, which are coupled with the driving shaft of a motor (not shown) via a driving force transmission mechanism (not shown), are rotated as required.

In the lower part of the body 1, a supply roller 32 is provided so as to take out sheets of paper P as image bearing members one by one, which are stored in a supply cassette 20. The sheet P taken out by the supply roller 32 is conveyed by a transport roller 33 to a resist roller 21 provided at the upper left of the transport roller 33, which aligns the leading edge of the sheet. Then, the resist roller 21 transports the sheet via a guide 34 toward the platen drum 22. The sheet is then wound around the platen drum 22 by means of a gripper 23, a pressure roller 25, ..., for precise paper transport. Here, the supply cassette 20 is detachable from the side of the body 1.

The supply cassette 20 allows a sheet size sensing section 35 to sense the size of the sheet P. The sheet size sensing section 35 is composed of multiple sensing switches (micro switches) that are turned on and off as a cassette of sheets P of a different size is inserted.

For example, the sensing section is made up of four sensing switches S0, S1, S2, and S3. As shown in Fig. 6, when only S0 is turned on, size A3 is sensed; when S0 and S1 are on, size B4 is sensed; when only S3 is on, size A4-R is sensed; when S1 and S3 are on, size B5-R is sensed; when S0, S1, and S3 are on, size A4 is sensed; when S0, S2, and S3 are on, size B5 is sensed; and when S1, S2, and S3 are on, size A5 is sensed.

Fig. 3 shows a manual paper supply unit 36 for manual supply of sheets P. Sheets P supplied from the manual paper supply unit 36 are also wound around the platen drum 22.

A sheet P whose leading edge is fixed in place by the gripper 23 is wound around the platen drum 22 as the drum rotates clockwise. After the edge has passed the printing area, the thermal head 24 is pressed against the platen drum 22 for printing.

After the printing has completed, to discharge the printed sheet, the platen drum 22 is rotated clockwise until the trailing edge of the paper sheet P reaches an outlet guide 27. The instance that the outlet guide is reached, the platen drum 22 is rotated counter-clockwise to allow the separating claw (not shown) to separate the trailing edge of the sheet P from the platen drum 22 and the sheet is directed to the paper outlet guide 27. Finally, the leading edge of the paper sheet P is released from the gripper 23 and the copied sheet P transported over the outlet guide 27 is discharged onto an outlet tray 28.

As shown in Fig. 2, at the front of the body 1, an operator panel section 37 is provided. The operator panel 37 is provided with a copy key 38 used to instruct a copy start, a reduction rate setting section 39 used to set a reduction rate, a composite mode switch 39-2, and others.

The automatic document feeder 40 is composed of a take-in section 1 that takes in a document O and a transport section 32 that transports a document O.

The take-in section 41 contains a tray 43 on which a document O is placed, a take-in roller 44 that takes in the document O on the tray 43, a pair of feed rollers 45 and 46, and a sensor 47 that senses the placement of a document O on the tray 43 and the passage of the document O and then produces a sense signal corresponding to the length of the document O. The sensor 47 is a known sensor that senses the placement of a document O on the tray 43 and the passage of the document O. On the top of the tray 43, a sensor 43 is provided which senses whether or not the tray is filled to capacity with documents O to be inserted.

The transport section 42 contains an endless belt 51 serving as document transport means, rollers 52, 52 over which the belt 51 is stretched, rollers 53, 53, 53, 53 that press the belt 51 against

the top surface of the document table 2, a transport guide 54 that guides the document O conveyed by the belt 51 upward, and a pair of outlet rollers 55 that discharges the document O conveyed over the transport guide 54.

An paper outlet section 56 that accepts discharged documents O is provided on the automatic document feeder 40.

With this arrangement, a document O put on the tray is taken in by the take-in roller 44 into the take-in section 41, and then transported by the feed rollers 45 and 46 to the transport section 42. The document O sent to the transport section 42 is conveyed by the transport belt 51 and stopped at the scanning start position on the document table 2. After the copying is finished, the document O is conveyed by means of the transport belt 51, guide 54, and the outlet roller pair 55 and discharged to the outlet section 56.

Fig. 1 schematically shows the entire control system.

In the figure, a main control section 61 is provided which controls the entire image forming apparatus. Connected to the main control section 61 are a first and a second sub-control section 62 and 63 that control each section.

Also connected to the main section 61 are the operator panel section 37, an automatic document feeder driving section 64, a document size sensing section 65, an image processing section 66, and an image memory section 67.

The automatic document feeder driving section 64 drives each roller in the automatic document feeder 40.

The document size sensing section 65, according to the sense signal from the sensor 47, determines the length of a document and, based on this length, senses the size of the document.

The image processing section 66 is a circuit that performs processes, including shading correction, on the image signal supplied from a document scanning section processing section 69 later explained. It supplies the processed image signal to an image forming section processing section 71 and the image memory section 67 under the control of the main control section 61.

The image memory section 67 stores the image signal from the image processing section 66 under the control of the main control section 61. The image signal stored in the image memory section 67 is read and supplied to the image processing section 66. For example, the image memory section 67 is designed to store reduced images of two or more documents.

A document scanning section driving section 68 and a document scanning section processing section 69 are connected to the first sub-control section 62. The document scanning section driving

section 68 actuates the illuminating lamp 6 and the scanning motor in the document scanning section 3. The document scanning section processing section 69 performs A/D conversion of an electric signal from the photoelectric conversion section 11 and supplies the resulting signal to the image processing section 66.

An image forming section driving section 70, an image forming section processing section 71, and the sheet size sensing section 35 are connected to the second sub-control section 63.

The image forming section driving section 70 drives the motor and the solenoid in the image forming section 4, depending on the sense result from the sheet size sensing section 35.

The image forming section processing section 71 controls the thermal head 24 according to the image signal supplied from the image processing section 66 to print an image on a sheet P.

With this configuration, explanation will be given as to a case where two documents are scaled down to copy them onto a single sheet.

The reduction rate is first set equal to or less than 70% with the reduction rate setting section 39 of the operator panel section 37. A plurality of documents O are put on the tray 43 and the copy key 38 is pressed. The zoom lens 16 is moved according to the reduction rate at the reduction rate setting section 39.

The size of sheets P in the supply cassette 20 is sensed by the sheet size sensing section 35, and the sense result is supplied to the main control section 61. For instance, the sheet size sensing section 35 supplies size A4-R to the main control section 61.

In this situation, when the copy key 38 is pressed, the main control section 61 checks to see if a document O is placed on the tray 43 and, if it is placed, drives the automatic document feeder driving section 64. This driving allows the document O on the tray 43 to be taken in by the take-in section 41, conveyed by the transport section 42, and placed on the document table 2. In this case, the length of the document is determined from the sense signal from the sensor 47 and, based on the length, the size of the document is sensed, and the sense result is supplied to the main control section 61. For instance, the sense result that the size of the document is size A4 or less is output.

Then, the main control section 61 drives the document scanning section driving section 68 to actuate the illuminating lamp 6 and the scanning motor 18 in the document scanning section 3. This allows the document scanning section processing section 68 to convert a reduced image obtained at the photoelectric conversion section 11 into an electric signal, further perform A/D conversion, and then supplies the resulting signal to the image

processing section 66.

The image processing section 66 performs processes, including shading correction, on the image signal supplied from the document scanning section processing section 69, and stores the resulting signal in the image memory section 67.

Next, the main control section 61 actuates the automatic document feeder driving section 64. This driving allows a second document O to be taken in by the take-in section 41, conveyed by the transport section 42, and placed on the document table 2. In this case, the length of the second document is determined from the sense signal from the sensor 47 and, based on this length, the size of the document is sensed, and the sense result is supplied to the main control section 61. For instance, the sense result that the size of the second document is size A4 or less is output.

Then, the main control section 61 drives the document scanning section driving section 68 to actuate the illuminating lamp 6 and the scanning motor 18 in the document scanning section 3. This allows the document scanning section processing section 68 to convert a reduced image obtained at the photoelectric conversion section 11 into an electric signal, further perform A/D conversion, and then supplies the resulting signal to the image processing section 66.

The image processing section 66 performs processes, including shading correction, on the image signal supplied from the document scanning section processing section 69 to obtain an image of the second document.

Then, the main control section 61 combines the image of the first document stored in the image memory section 67 and the image of the second document obtained at the image processing section 66 and supplies the resulting composite image to the image forming section processing section 71.

The image forming section processing section 71 prints on a sheet P the composite image of two documents supplied from the image processing section 66.

Specifically, as shown in Fig. 10, the image of two documents of size A4 transported by the automatic document feeder 40 is printed on a single sheet of size A4.

When no document O is placed on the tray 43 in the automatic document feeder 40, or when the size of a document O placed on the document table 2 by the automatic document feeder 40 is equal to or larger than size A4, the main control section 61 judges that a copying process should be performed on the single document O on the document table 2, and drives the document scanning section driving section 68 to actuate the illuminating lamp 6 and the scanning motor 18 in the

document scanning section 3. This allows the document scanning section processing section 68 to convert a reduced image obtained at the photoelectric conversion section 11 into an electric signal, further perform A/D conversion, and then supplies the resulting signal to the image processing section 66.

The image processing section 66 performs processes, including shading correction, on the image signal supplied from the document scanning section processing section 69, and supplies the resulting signal to the image forming section processing section 71.

The image forming section processing section 71 prints the image supplied from the image processing section 66 onto a sheet P.

When the second document is not conveyed by the automatic document feeder 40 but manually placed on the document table 2, or when the size of the document O placed on the document table 2 by the automatic document feeder 40 is size A4 or more, the main control section 61 supplies the image of the first document stored in the image memory section 67 as it is to the image forming section processing section 71.

The image forming section processing section 71 then prints the image supplied from the image processing section 66 onto a sheet P.

Then, the main control section 61 drives the document scanning section driving section 68 to actuate the illuminating lamp 6 and the scanning motor 18 in the document scanning section 3. This allows the document scanning section processing section 68 to convert a reduced image obtained at the photoelectric conversion section 11 into an electric signal, further perform A/D conversion, and then supply the resulting signal to the image processing section 66.

The image processing section 66 performs processes, including shading correction, on the image signal supplied from the document scanning section processing section 69, and supplies the resulting signal to the image forming section processing section 71.

The image forming section processing section 71 then prints the image supplied from the image processing section 66 onto a sheet P.

As explained above, when copying is done in the reduction mode using the automatic document feeder 40, the reduction rate of the first document O is equal to or less than half the size of the output sheet P and when the reduction rate of the next document O is also equal to or less than half the size of the output sheet P, the images of those two documents O are scaled down to print them on a single output sheet P.

Figs. 8 and 9 are flowcharts for the above-described processing, centering on the processing

at the main control section 61. First, it is confirmed that the reduction mode is on (S1). Then, check is made to see if it is the A3 to A4 reduction mode (S2). If it is not, control returns to step S1. Next, check is made to see if automatic document feeding is used (S3). If it is not, an ordinary reduction process is performed (S12). Then, check is made to see if the document sheet is of size A4 or less (S4). If it is not, control proceeds to the aforesaid reduction process (S12). If it is, an image reduction process is performed on the image information on the document (S5). The image information is then stored in the image memory 67 (S6). Next, check is made to see if a subsequent document is to be transported automatically (S7). If it is not, the image data in the image memory 67 is output on an A4-size sheet (S13), and the next document is scaled down (S14). This reduced document is output on a subsequent A4-size sheet (S15). In this case, of course, the combining of the image information is not done. If a subsequent document is to be transported automatically and is of size A4 or less (S7, S8), the subsequent document is subjected to a reduction process (S9). The resulting reduced image is combined with the preceding reduced image information stored in the image memory 67 (S10). Then, this composite image is output on an A4-size copying sheet (S11). After this operation is completed, control returns to step S1, and a series of the operations described above is repeated (S16).

Fig. 11 is an explanatory diagram used to explain the relationship between document images of different sizes and images printed on output sheets. It can be seen from the figure that the automatic judging function of the present invention realized by the main control section 61 and others, enables consecutive documents A through E of size A3 and size A4 to be suitably combined and copied. Specifically, on a first copying sheet 101, the reduced image of document A of size A3 is output directly; on a second copying sheet 102, the reduced images of documents B and C of size A4 are combined and the resulting composite image is output; and on a copying sheet 103, only the single reduced image of document D of size A4 is output. Here, it can be understood that the control section 61 has judged that the next document E could not fit in the output paper sheet 103 even if combination were done, since document E is of size A3. Then, on the copying sheet 104, only the single reduced image document E of size A3 is output.

With reduced copying by conventional ordinary automatic document feeding, the first copying sheet 101 cannot have a composite image of multiple documents on it as seen on the copying sheet 102. Even with such a type as allows the settings for a composite image, it is impossible to obtain a

suitable composite image as shown in the embodiment of the present invention, because the documents are of different sizes including size A3 and size A4.

Fig. 12 is a flowchart used to explain the operation of a more general image forming apparatus of the present invention. Another embodiment of the present invention allows the copying of a composite image in various modes, not limited to the automatic composite mode based on the A3 to A4 reduction mode at the time of automatic document feeding. Specifically, with the composite mode specified at the composite mode switch 39-2 of Fig. 1, judgment on each document enables the copying of a suitable composite image on copying sheets of a constant size at a set constant reduction rate, even if documents are of different sizes.

In this flowchart, when the reduction composite mode is selected (S21), it is asked whether the document is to be transported automatically or not (S22). If it is not, the document sheet is subjected to an ordinary image reduction process (S30) and then output on a copying sheet (S28). If it is, an image reduction process is performed on the document (S23), and the reduced image is stored in the image memory section 67 (S24). Next, based on the size of a subsequent document, the reduction rate, the size of a copying sheet, and the size of the reduced image stored in the image memory section 67, it is judge mainly by the main control section 61 whether or not it is possible to combine the reduced image with the image containing the image information on the subsequent document (S25). If it is impossible, the reduced image stored is output on a copying sheet (S28). If it is possible, the image of the subsequent document is scaled down (S26), and the reduced image is also stored in the image memory 67 for formation of a composite image (S27). Then, it is judged again whether or not it is possible to combine the image of a subsequent document with the stored reduced image. The combination is repeated as long as it is possible. When the capacity for the copying sheet of the image memory 67 is full and it is judged that further combination is impossible, the resulting composite image is output on the copying sheet (S28). This action is repeated until the document sheets run out (S29). The present invention is not restricted to the above embodiments, but may be applied to various modifications as long as they provides the effect of the invention. For instance, while in the above flowchart, the automatic document feeding is a requirement for combining images, manual selection of the composite mode may allow documents to be combined until the capacity for the copying sheet of the image memory gets full.

In addition to an automatic start of the composite mode in the A3 to A4 reduction in the automatic document feeding, the automatic composite mode may be achieved in other reductions, including A3 to A4, B4 to B5, A4 to B5, and B4 to A4. In the embodiments, reduction is a requirement for the automatic composite mode. Even if reduction is not required, however, it may be possible to judge whether or not the composite copying of documents of different sizes can be done on a copying sheet and copy the composite image on the sheet as long as the copying sheet has enough space to accept the composite image.

Fig. 13 is an explanatory diagram for the relationship between images of documents of different sizes and images printed on the output sheet. In the figure, based on the size of copying sheets 105 through 109, a specified reduction rate, and the size of each document, it is judged that composite copying of documents F through O of different sizes is possible, and a process is carried out. On a copying sheet 105, three documents F, G, and H are combined and copied; on a copying sheet 106, documents I and J are combined and copied. Since the next document K cannot be combined with the images on the copying sheet 106, it is combined with document L on a subsequent copying sheet 107. The composite image of documents M and N is copied on a copying sheet 108. Document O is copied on a copying sheet 109.

As described in detail, with a copying apparatus and method of the present invention, documents can be copied in the form of a suitable composite image by judging a possibility of a composite image for each of documents of different sizes, taking into account the reduction rate, the size of copying sheet, and the size of each document. This allows a saving of copying sheets with a simple operation by automatic document feeding. In addition to this, copying can be done on a copying sheet with less wasteful space.

Claims

1. An image forming apparatus, comprising:
 - means (69) for reading a first original image on a first document and a second original image on a second document consecutively;
 - means (71) for forming a first image and a second image on image bearing members respectively in accordance with the first original image and the second original image read by the reading means so that the first image and the second original image is reduced at a predetermined reduction rate;
 - first detecting means (65) for detecting each size of the first document and the second document;
 - second detecting means (66) for detecting that an area occupied by the first image and the second image is less than that of the image bearing member, based on the document size detected by the first detecting means, the reduction rate and a size of the image bearing member; and
 - means (66) for combining the first image and the second image so that the first image and the second image are formed on one image bearing member corresponding to the detection of the second detecting means.
2. An image forming apparatus according to claim 1, characterized in that the combining means combines the reduced images of two or more documents.
3. An image forming apparatus according to claim 1, characterized in that the second detecting means also detects a possibility of a second and later documents being combined.
4. An image forming apparatus according to claim 1, characterized in that the second detecting means makes a detection only when a mode in which the apparatus reduces an A3-size document to an A4-size one is selected.
5. An image forming apparatus according to claim 1, characterized in that the second detecting means makes a detection only when a mode in which the apparatus reduces an A3-size document to an A4-size one, a mode in which the apparatus reduces an A3-size document to a B4-size one, a mode in which the apparatus reduces a B4-size document to a B5-size one, a mode in which the apparatus reduces an A4-size document to a B5-size one, or a mode in which the apparatus reduces a B4-size document to an A4-size one is selected.
6. An image forming method comprising:
 - a step (69) of reading a first original image on a first document and a second original image on a second document consecutively;
 - a step (71) of forming a first image and a second image on image bearing members respectively in accordance with the first original image and the second original image read by the reading means so that the first image and the second original image read by the reading means so that the first image and the second original image is reduced at a predetermined reduction rate;
 - a first detecting step (65) of detecting each size of the first document and the second

document;

a second detecting step (66) of detecting that an area occupied by the first image and the second image is less than that of the image bearing member, based on the document size detected by the first detecting means, the reduction rate and a size of the image bearing member; and

a step (66) of combining the first image and the second image so that the first image and the second image are formed on one image bearing member corresponding to the detection of the second detecting step.

7. An image forming method according to claim 6, characterized in that the second detecting step makes a detection only when a reduction process is performed in a mode for reducing an A3-size document to an A4 one at the reducing step.
8. An image forming method according to claim 6, characterized in that the second detecting step makes a detection only when a reduction process is performed in a mode for reducing an A3-size document to an A4-size one, a mode for reducing an A3-size document to a B4-size one, a mode for reducing a B4-size document to a B5-size one, a mode for reducing an A4-size document to a B5-size one, or a mode for reducing a B4-size document to an A4-size one at the reducing step.

35

40

45

50

55


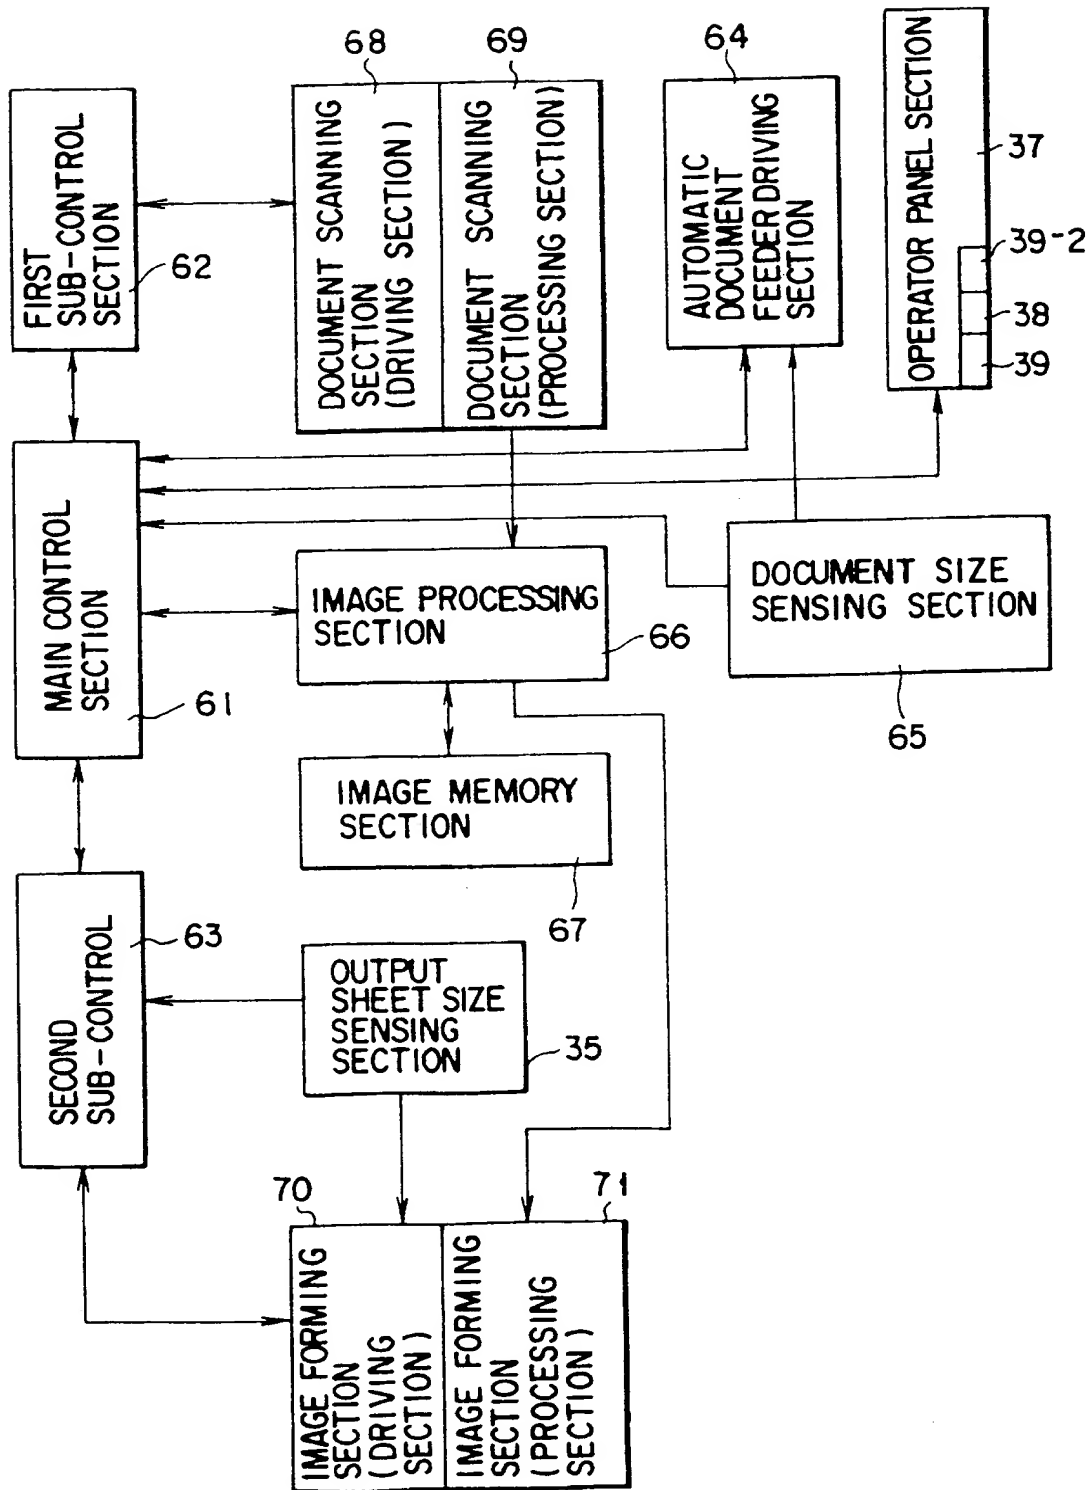


FIG. 1

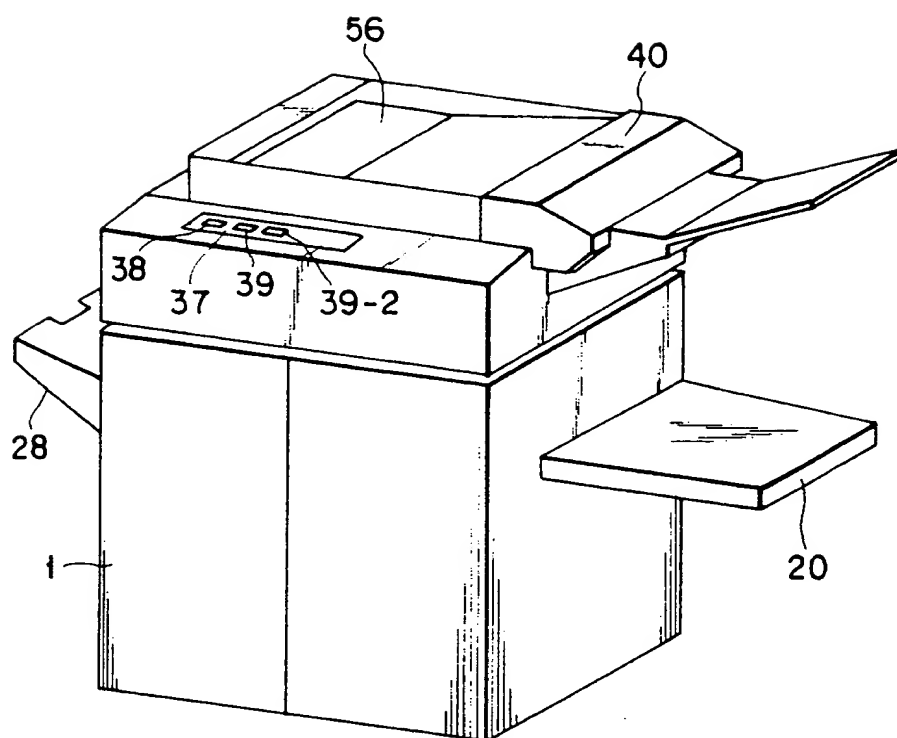

F I G. 2



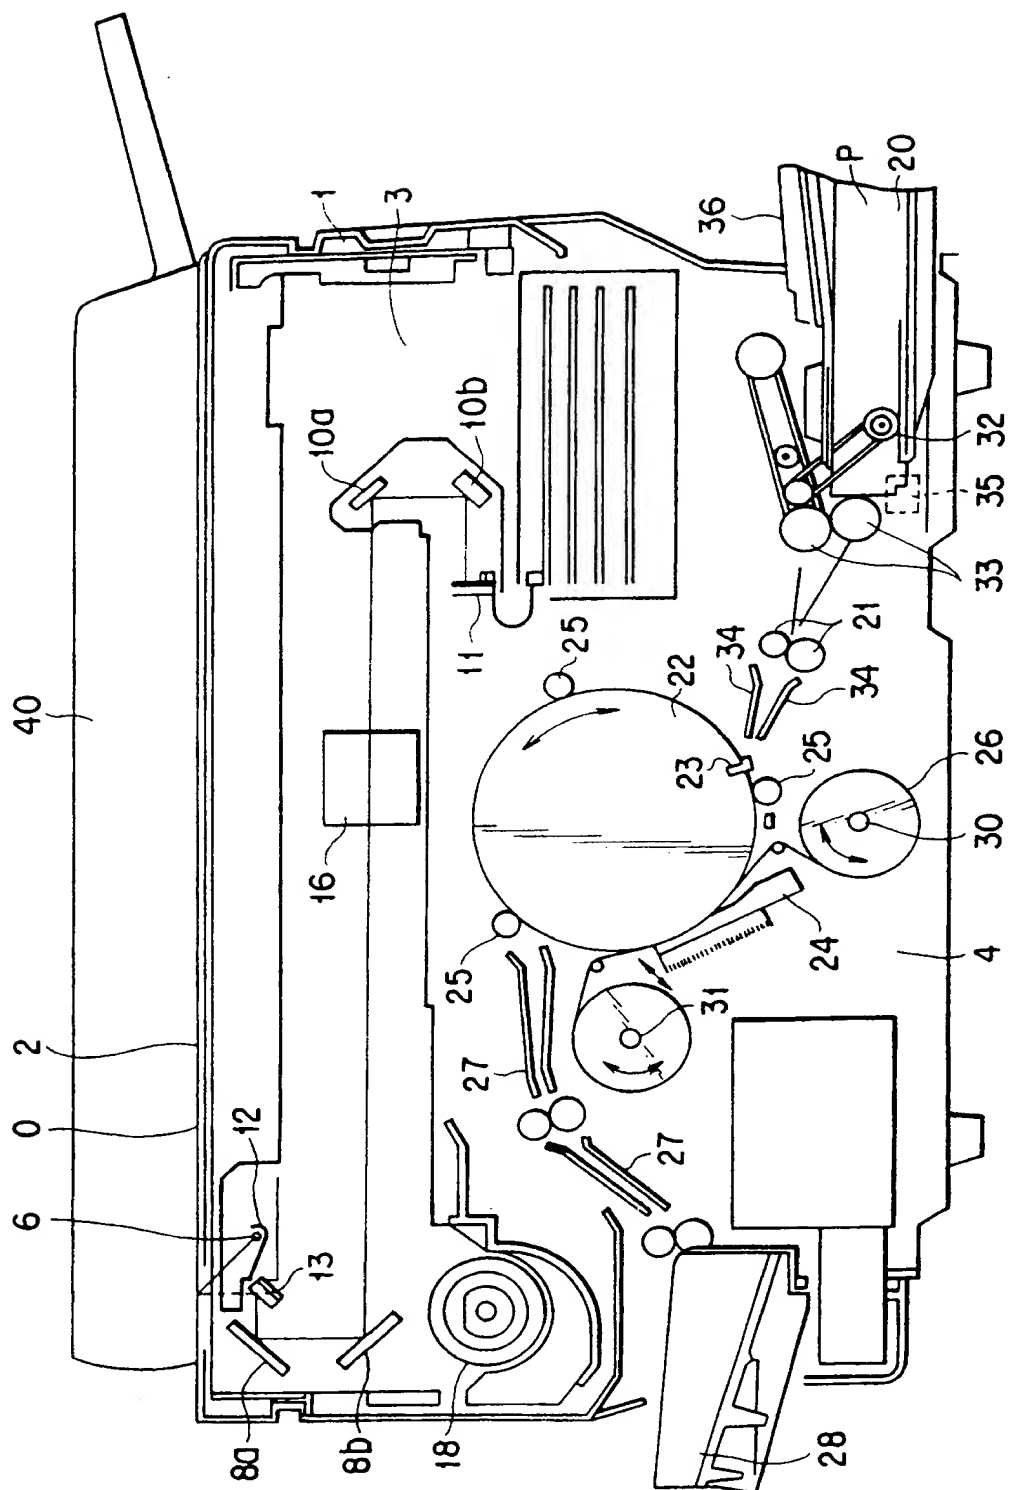


FIG. 3

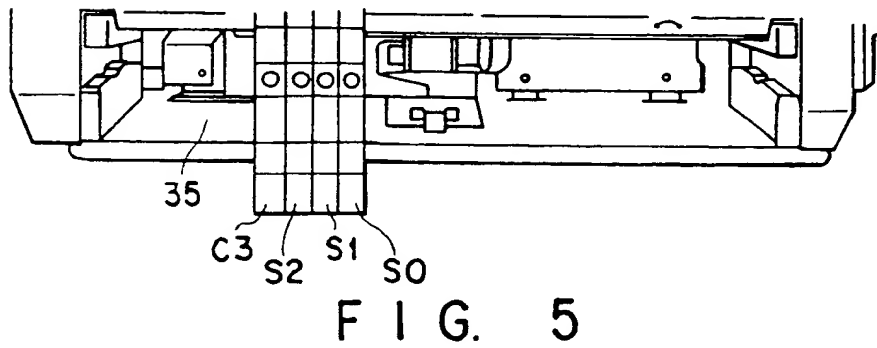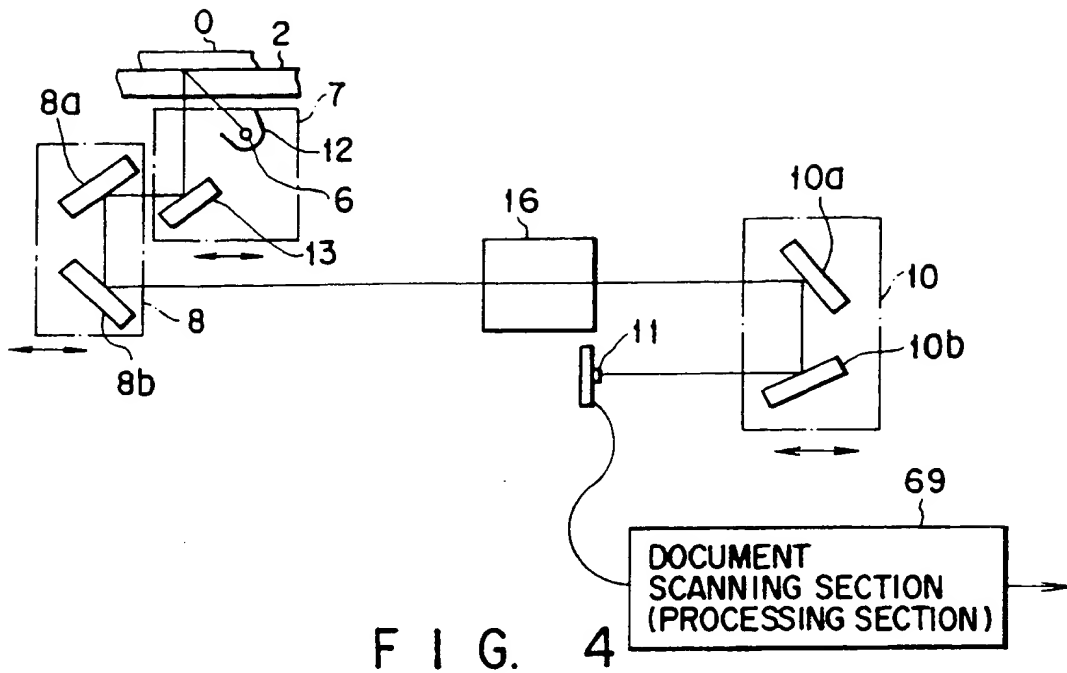

SHEET SIZE IN SUPPLY CASSETTE	SENSING SWITCHES			
	S3	S2	S1	S0
A 3	—	—	—	○
B 4	—	—	○	○
A 4 - R	○	—	—	—
B 5 - R	○	—	○	—
A 4	○	—	○	○
B 5	○	○	—	○
A 5	○	○	○	—

FIG. 6 ○ : ON

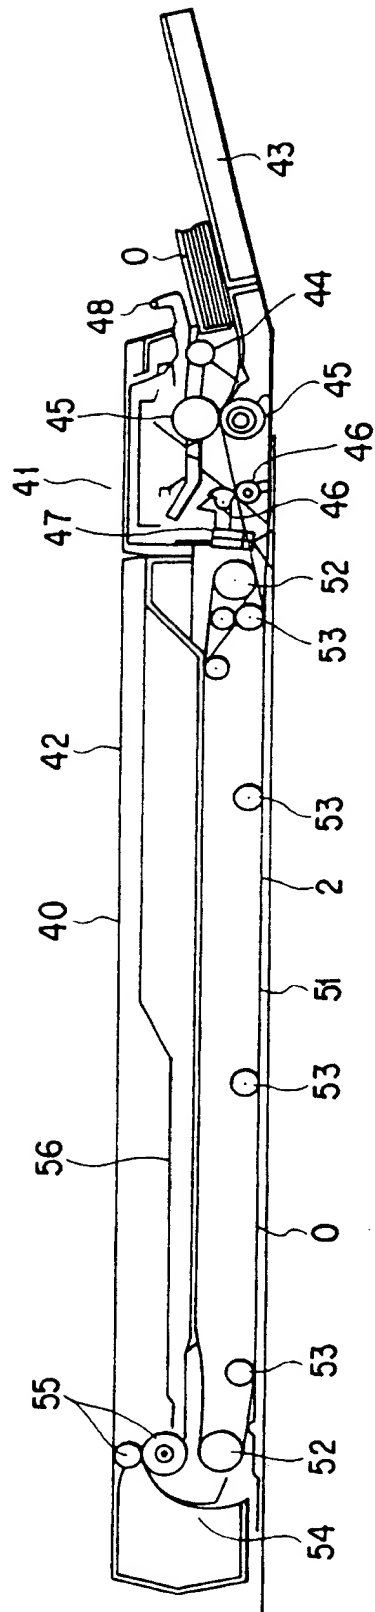


FIG. 7

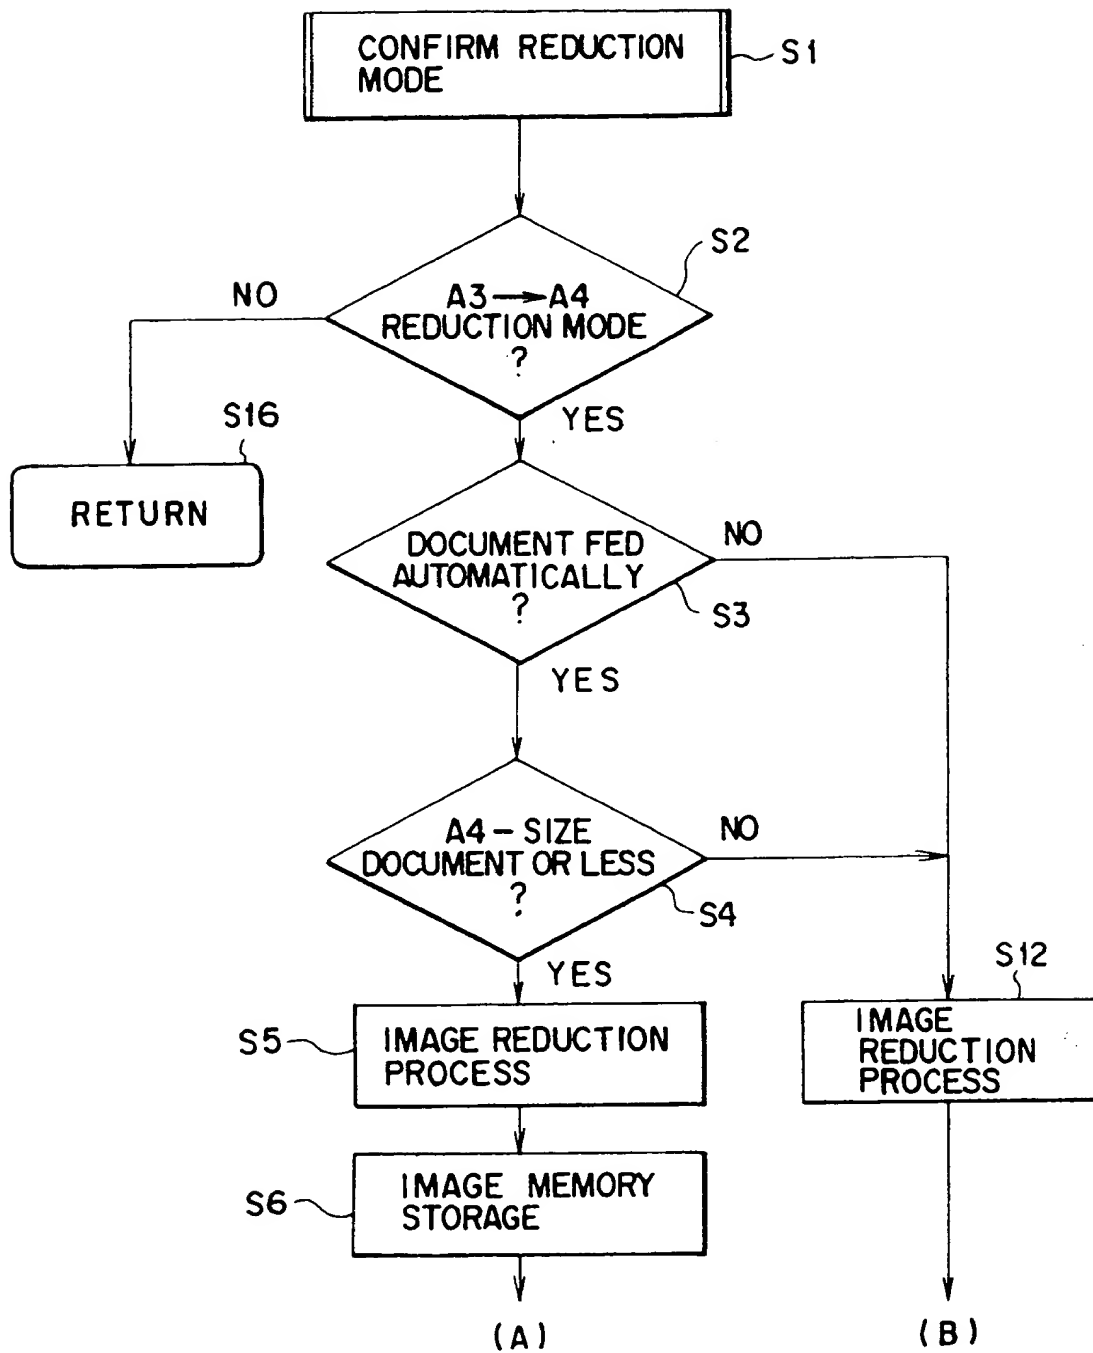


FIG. 8


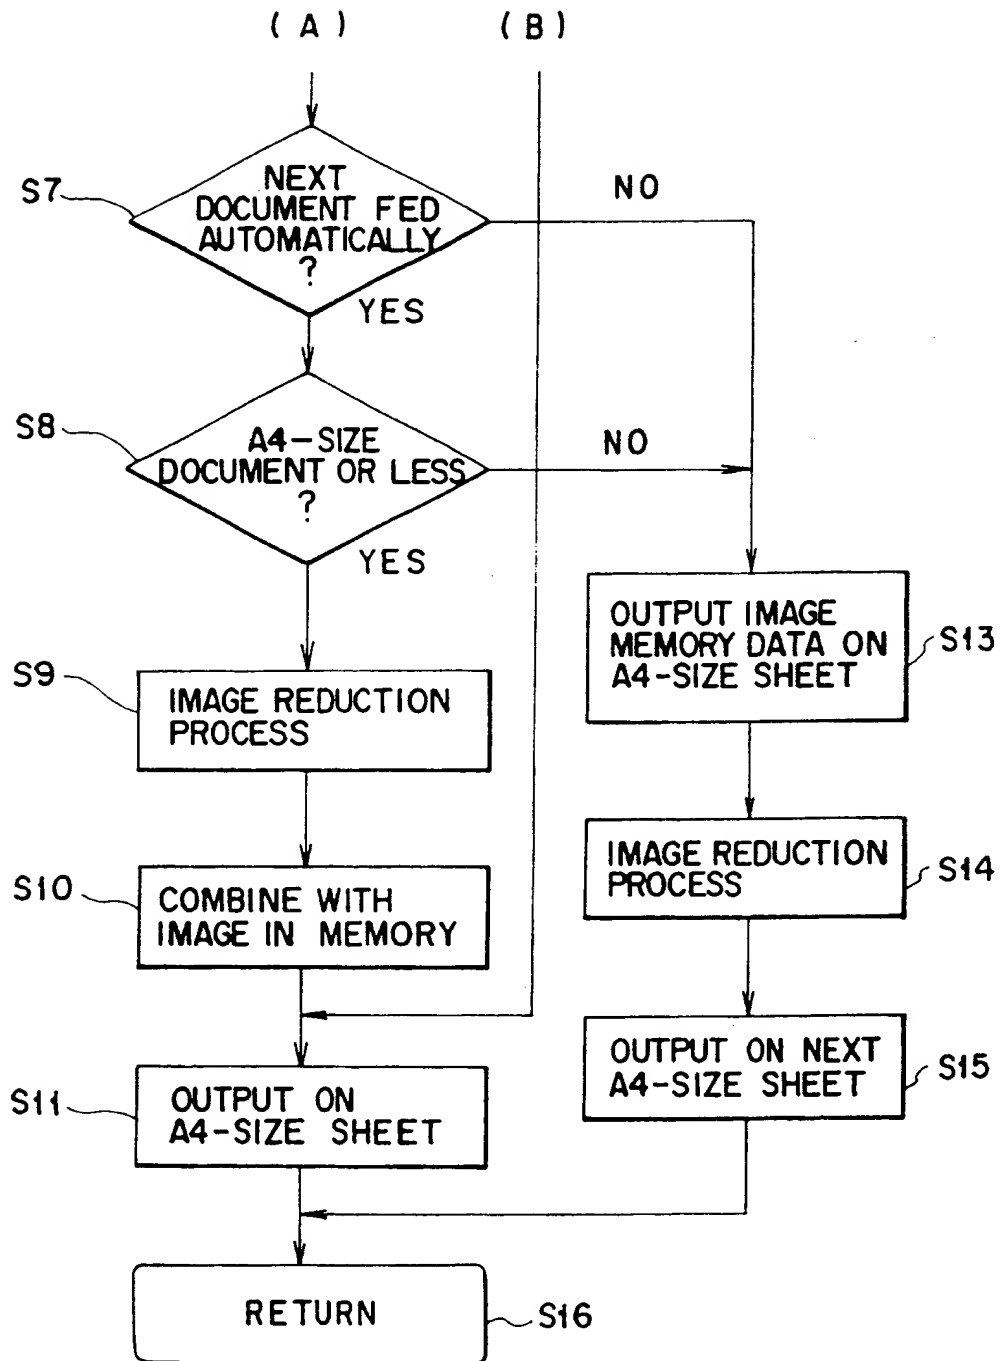


FIG. 9

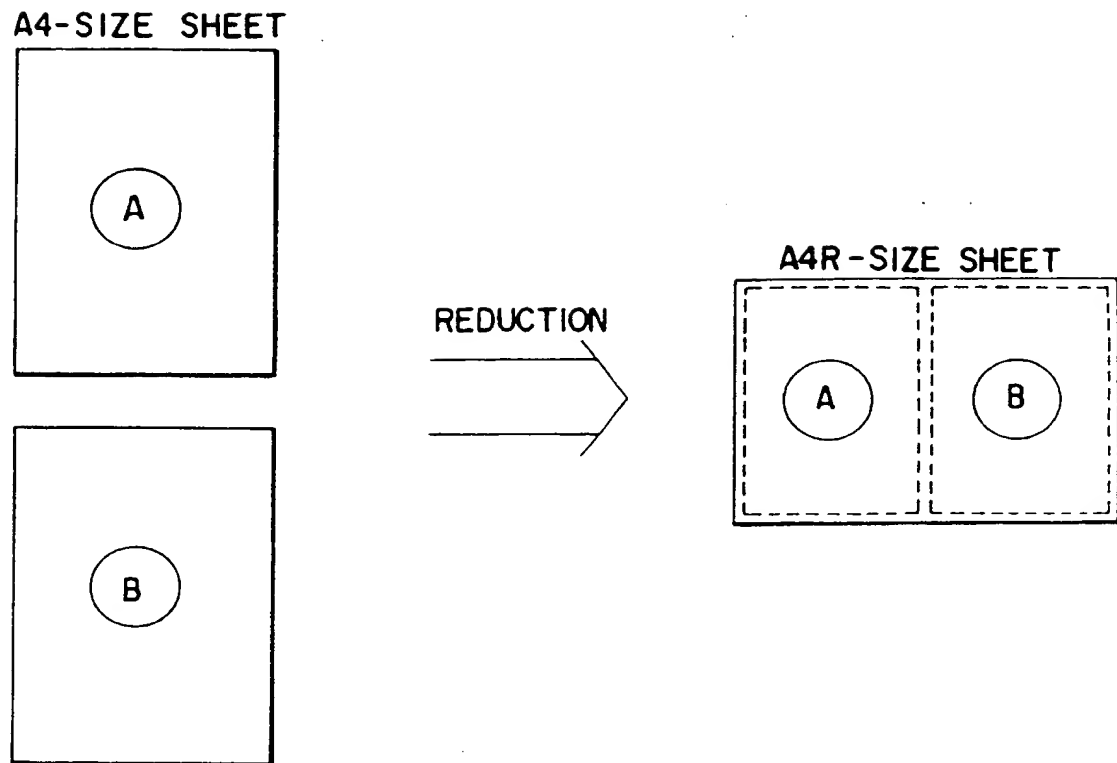

F I G. 10

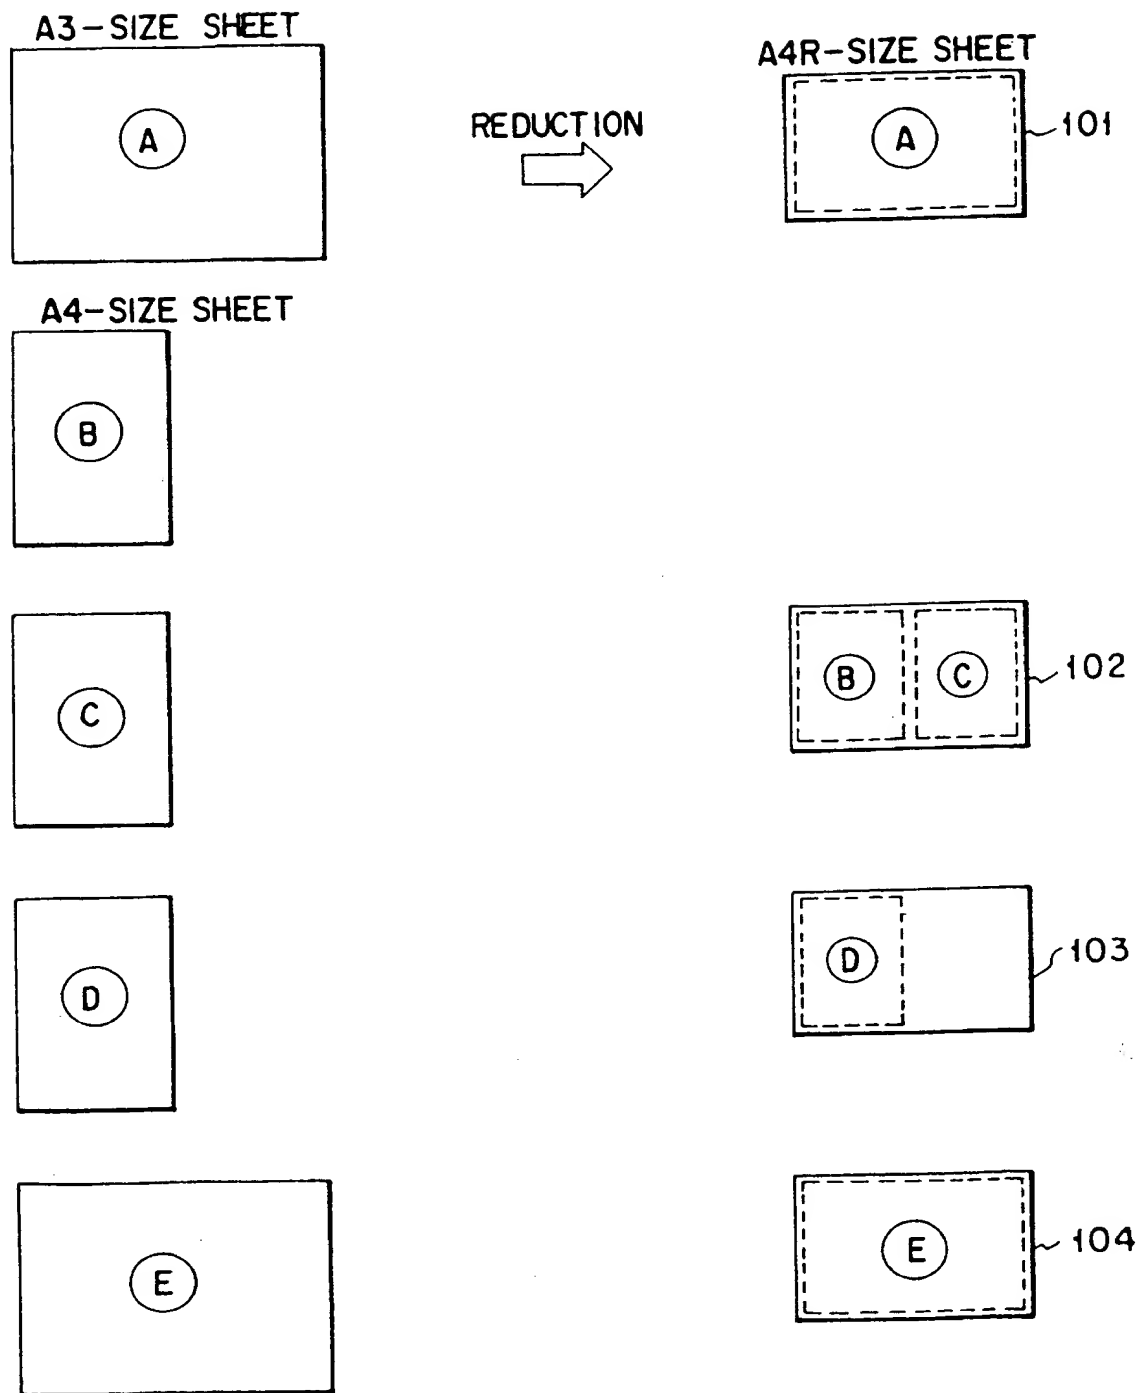


FIG. 11

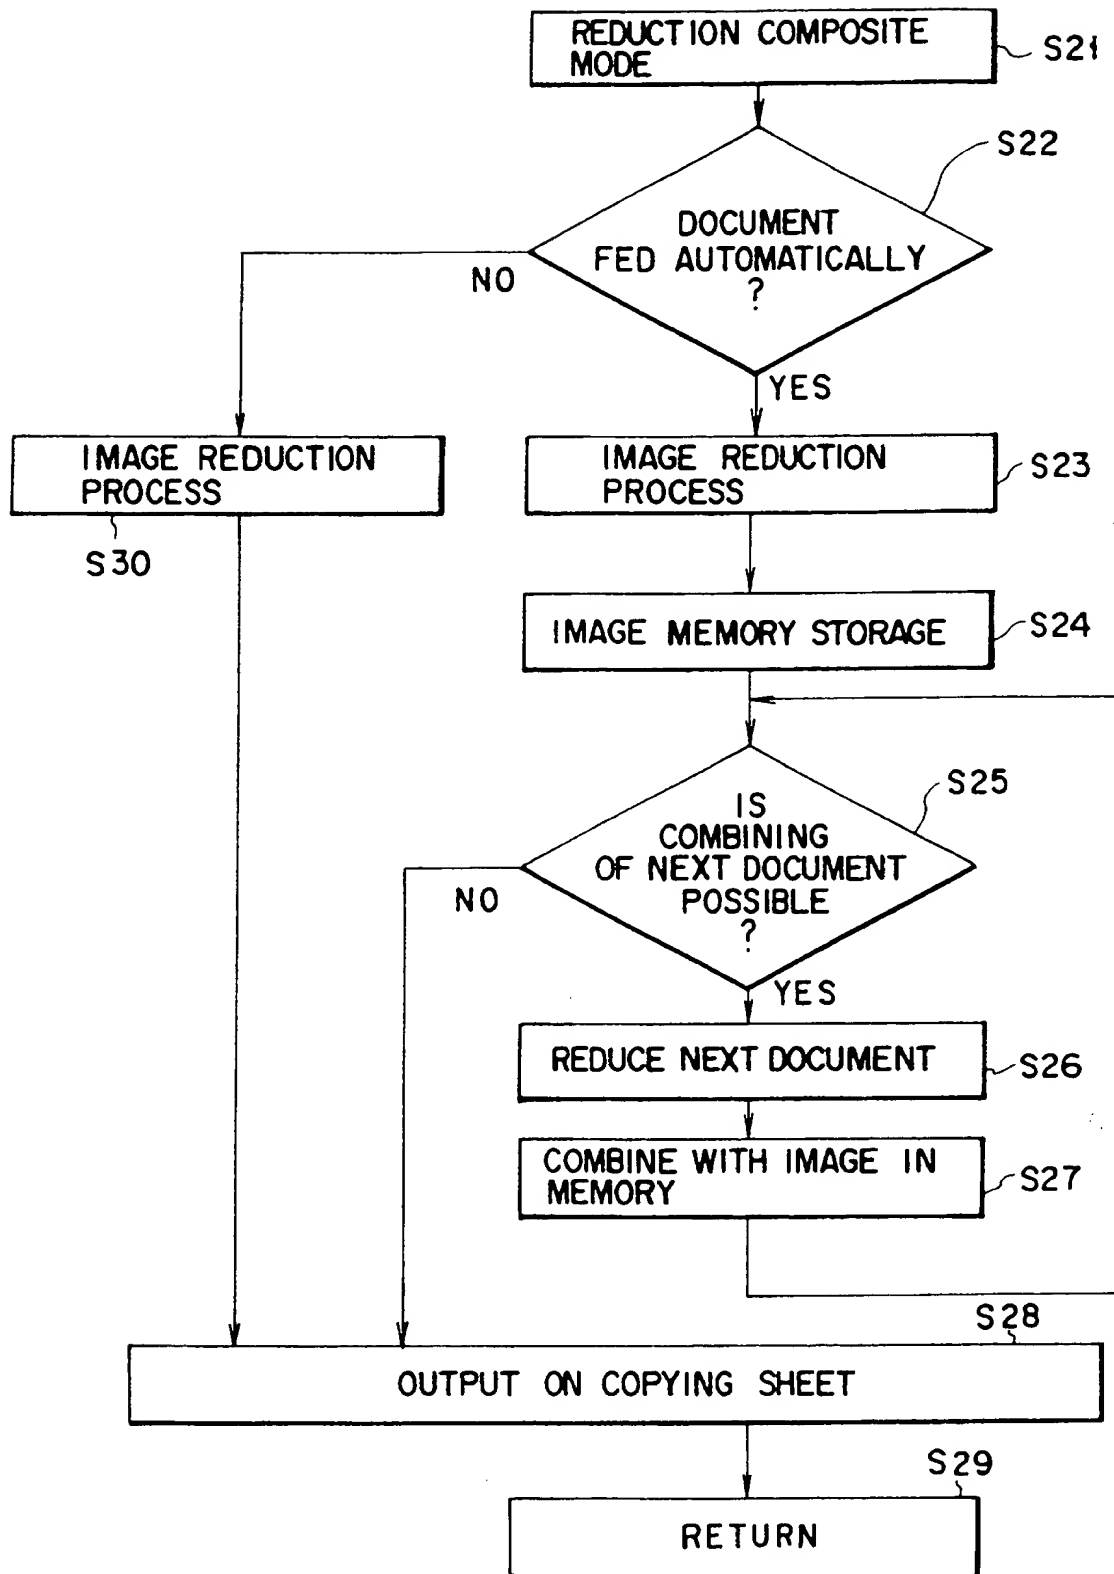


FIG. 12

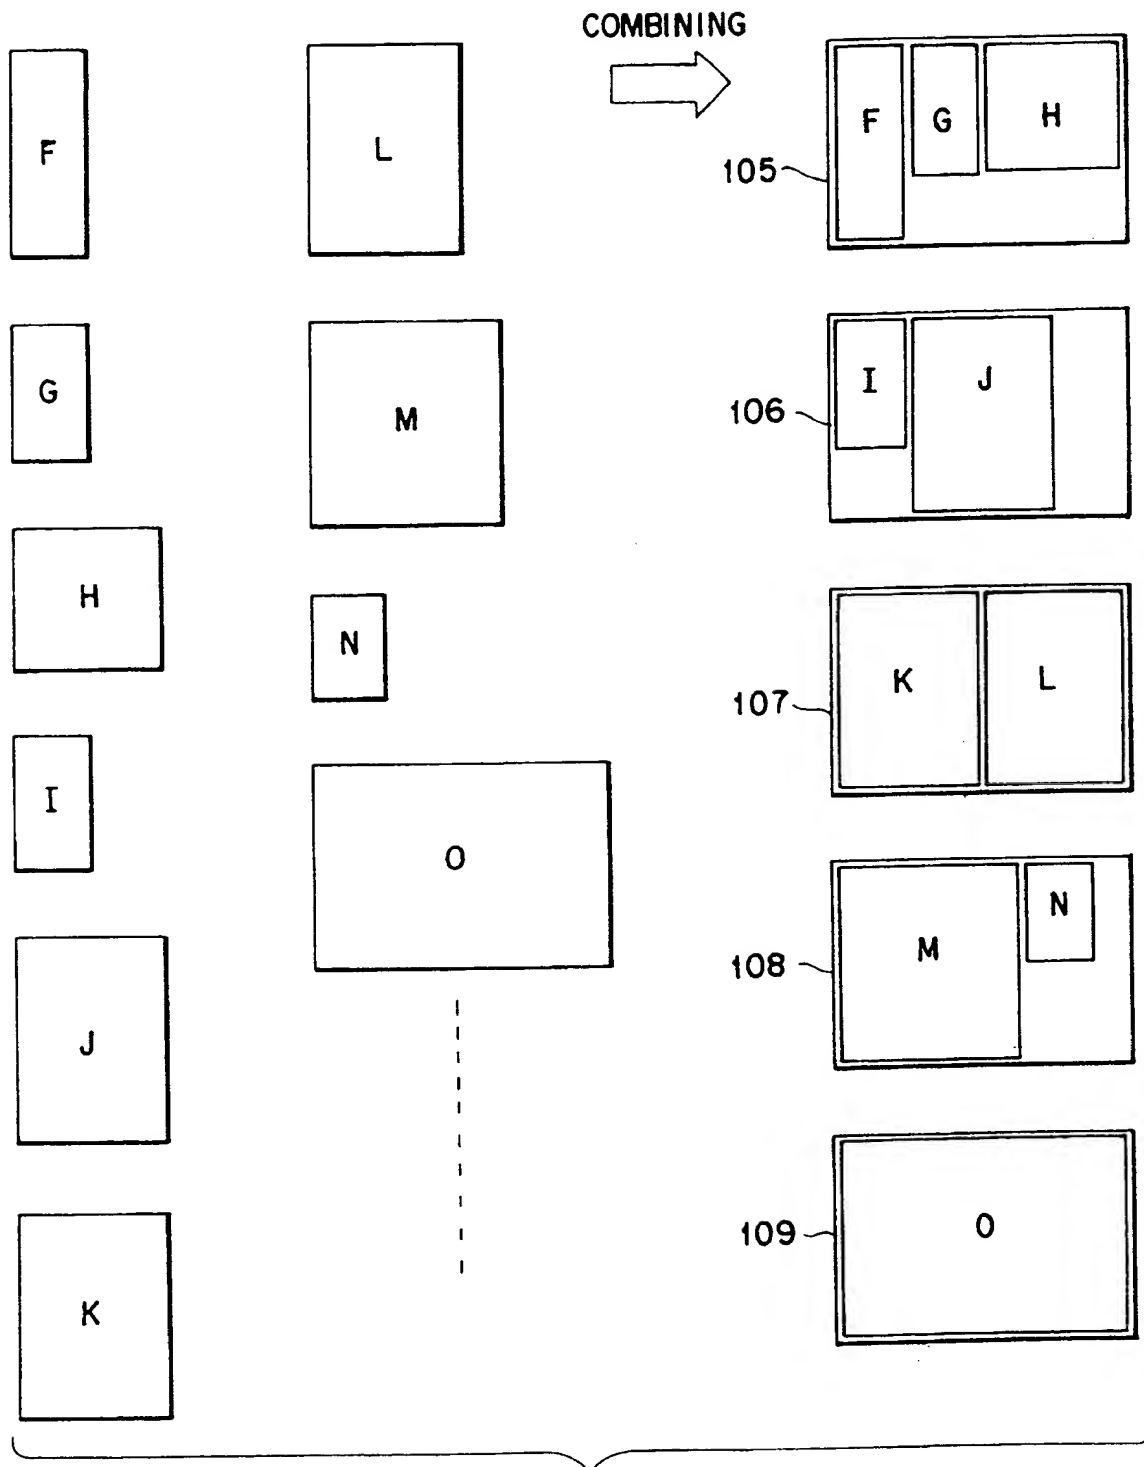


FIG. 13



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 93 10 4680

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A	EP-A-0 489 173 (CANON K.K.) 10 June 1992 * column 9, line 44 - column 10, line 41; figures 11A,11B,12,13 * ---	1-8	H04N1/387
A	EP-A-0 450 552 (FUJI PHOTO FILM CO., LTD.) 9 October 1991 * column 20, line 1 - line 10; figures 21A,21B * ---	1-8	
A	EP-A-0 429 049 (SHARP K.K.) 29 May 1991 * column 9, line 18 - column 10, line 16; figure 4 * -----	1-8	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			H04N
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 29 SEPTEMBER 1993	Examiner REVELLIO H.S.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons & : member of the same patent family, corresponding document			

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)